

PROFILES


LINES

Lines go too quickly to appreciate the pleasures of the journey. They rush straight to their target and then die in the very moment of their triumph without having thought, loved, suffered or enjoyed themselves. Broken lines do not know what they want. With their caprices they cut time up, abuse routes, slash the joyous flowers and split the peaceful fruits with their corners. It is another story with curved lines.

René Crevel — poet

ALUMINIUM PROFILES

CABLE FEEDING GUIDE

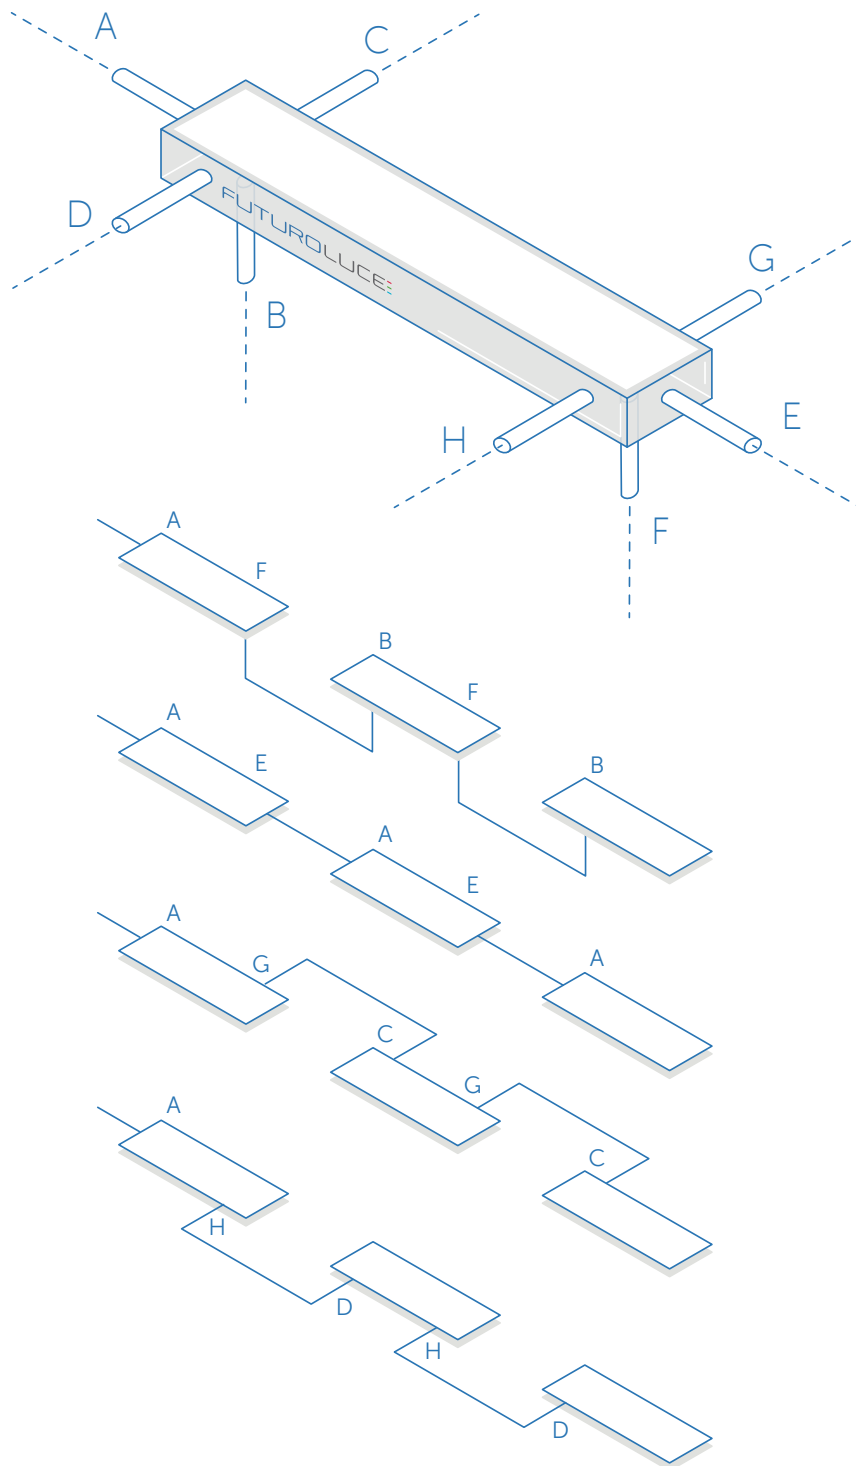

- CAV-A STANDARD front feeding
- CAV-E End feeding
- CAV-B Bottom feeding
- CAV-F Bottom feeding
- CAV-D Right feeding
- CAV-H Right feeding
- CAV-C Left feeding
- CAV-G Left feeding

NOTE:
The sketch shows the configuration possibilities of feeding cable. Please specify in each position of your order the correspondent code of the feeding cable position you want to have.

ALUMINIUM PROFILES LED MODULES MATCHING CHART


	SERIE ALFA	SERIE BETA	SERIE GAMMA	SERIE DELTA	SERIE OMEGA	SERIE SLOT
MDL-0753020080	●	●	●	●	●	●
MDL-0755630080	●	●	●	●	●	●
MDL-1503020040	●	●	●	●	●	●
MDL-1505630040				●	●	●
MDL-0753528080RGB	●	●	●	●	●	●
FLX-0365630160	●	●	●	●	●	●
FLX-0755630080	●	●	●	●	●	●
FLXS-1203020050	●	●	●	●	●	●

ALUMINIUM PROFILES POTTING MATCHING CHART

	SERIE ALFA	SERIE BETA	SERIE GAMMA	SERIE DELTA	SERIE OMEGA	SERIE SLOT
CMF: COMFORMAL COATING	●	●	●	●	●	●
RES-CLR: SOFT CLEAR POTTING FOR IP67	●	●	●	●	●	
RES-WHT: SOFT OPAL POTTING FOR IP67	●	●	●	●	●	
RES-HD-CLR: WALKOVER HARD CLEAR POTTING FOR IP67		●	●	●	●	
RES-HD-WHT: WALKOVER HARD OPAL POTTING FOR IP67		●	●	●	●	

TECHNICAL
DRAWING

SCALE 1:1

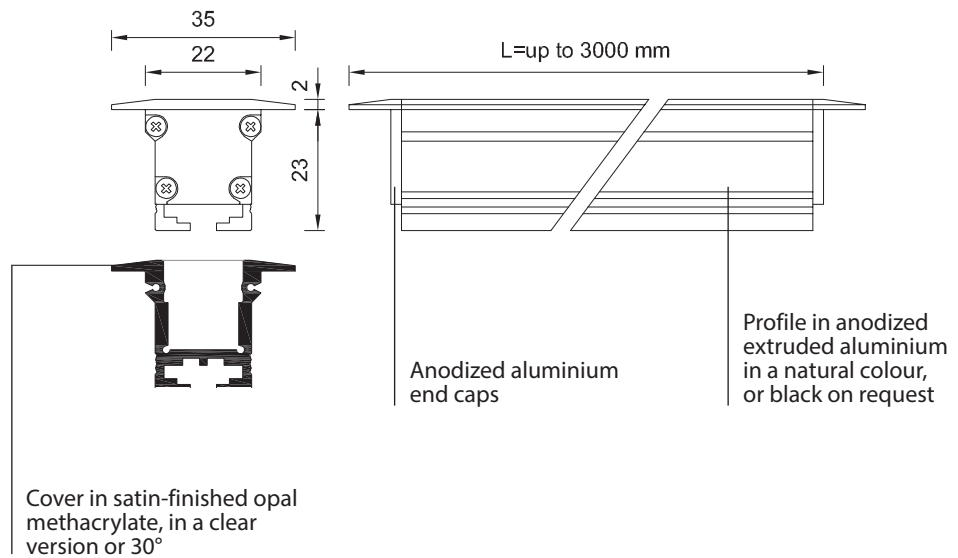

FEATURES

- Perfect uniformity
- Elegant frame design
- Easy installation with spring clips
- Various cover versions
- 30° Lens cover available to reduce the light beam

OMEGA SERIES

APPLICATIONS

The Omega aluminum profile was designed for integration purposes in all types of surfaces, including thin metal sheet and plasterboard. It is available with clear or opal cover. The 30° lens version allows to concentrate the light in a medium beam to light up the surfaces as wall washer. The elegant bevelled frame and the simple spring clip enables rapid and efficient installation. For this reason this element is aesthetically pleasing even when switched off and is thus suitable for a variety of different uses: from homes to museum, from contract to retail sales areas.



HOW TO ORDER

CODING	OMEGA	COVER	LENGTH
	NAME		
	Example: OMEGA-LWH150		
			CODE
NAME	OMEGA		OMEGA
COVER TYPE	with clear cover		CLR
	with opal cover		LWH
	30° lens cover		F30
	no cover		NNN
LENGTH	up to 50 cm		050
	from 50 to 100 cm		100
	from 100 to 150 cm		150
	from 150 to 200 cm		200
	from 200 to 250 cm		250
	from 250 to 300 cm		300

Note:
Standard cable feed type A
(code CAV-A).
See page 274 for different feeding
configurations.



No cover



With clear cover



With opal cover



With 30° lens
cover

SPECIFICATIONS

PHYSICAL

Body material	Aluminium
Body finish	Anodized
Screen material	PMMA
Protection rating	IP20
Weight	0,53 Kg/m
Mounting	Any position

ACCESSORIES

Mounting kit

Mounting spring kit (1 pc.)

CMP00915